


DIGIMIC[®] lean⁺ Folding Microphone

Conference Microphone TMD/01

Article no.: 05.1025.D

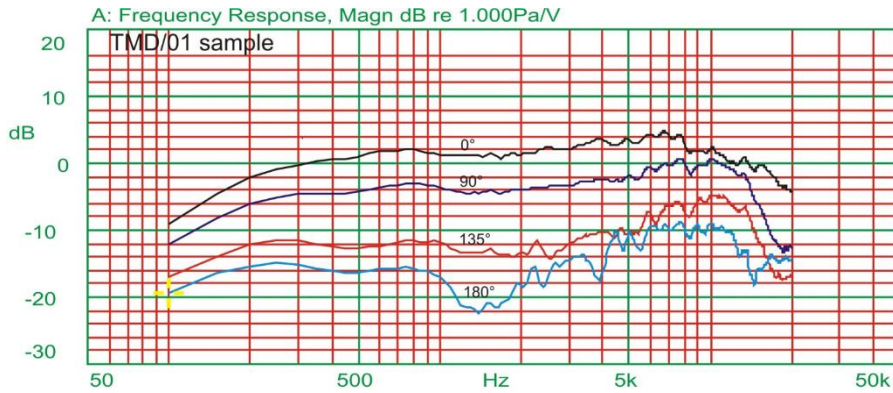

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without

Description

Professional electret microphone with integrated mic button and ON status light ring indicator. Rigid microphone neck with gooseneck hinge with matt black finish. Integrates into the digital modular CMic lean⁺system. Low sensitivity to radio frequencies interference from mobile telephones, PDAs and other wireless devices operated within a conference room.

Technical Data

Complies with international standard IEC914

Transducer Principle

Electret condenser

Directivity

Cardioid

Frequency Response

90 Hz ... 18.000 Hz see diagram

Sensitivity (free field, no load, 1 kHz)

-43 dB (0dB = 1V/Pa)

Output Impedance

1 kOhm

Max. SPL (Signal pressure level)

120 dB

Signal-to-noise Ratio

>68 dB (A-weighted, 1kHz)

Operating Voltage

5 VDC (1.5V ... 9V)

Indicator Ring

colour red

Nominal current 20 mA (50 mA max.)

Dimensions

Total length 295 mm

dia 16.0 mm

Weight

90 g

WPF 05.1025.D 22.02.2016