
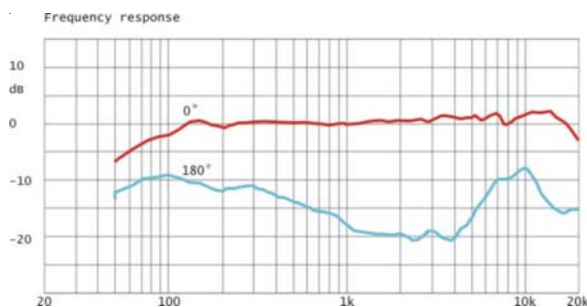


Microphones

Conference Microphone TM58/6

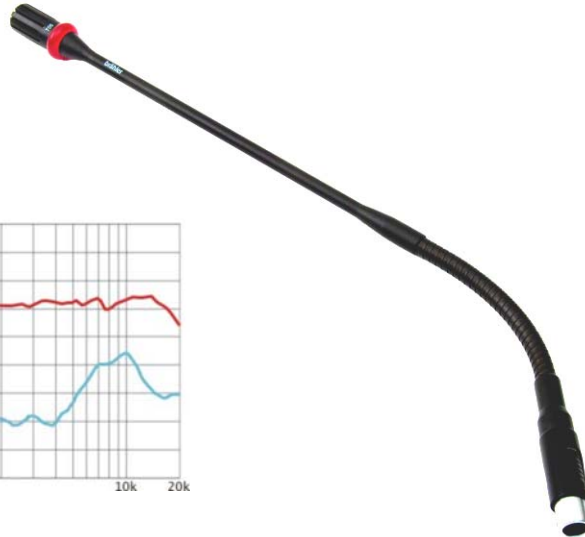

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without notice.

Description

Professional electret microphone with ON status light ring indicator. Rigid microphone neck with gooseneck hinge and high quality connector (MINICON Neutrik), matt black finish.

Low susceptibility to mobile phone interference, PDAs and other wireless devices operated within a conference room.

Technical Data

Complies with international standard IEC914

Transducer Principle

Electret condenser

Directivity

cardioid

Frequency Response

30 Hz ... 20.000 Hz see diagram

Sensitivity (free field, no load, 1 kHz)

-43 dB (0dB = 1V/Pa)

Output Impedance

1 kOhm

Max. SPL (Signal pressure level)

120 dB

Signal-to-noise Ratio

>68 dB (A-weighted, 1kHz)

Operating Voltage

5 VDC (1.5V ... 9V)

Indicator ring

colour red

Nominal current 20 mA (50 mA max.)

Connector

Neutrik Minicon

Dimensions

Total length 360 mm

dia 17.5 mm

Weight

80 g

Accessories

Wind shield (included in delivery)

Optional

TM58/6-500 Conference Microphone
500mm, black
(part no. 01.0561)

TM58/6S Conference Microphone
360mm, silver
(part no. 01.0562)

TM58/6-800 Conference Microphone
800mm, black
(part no. 01.0563)