


## Premium Microphones

### Conference Microphone TMD/382

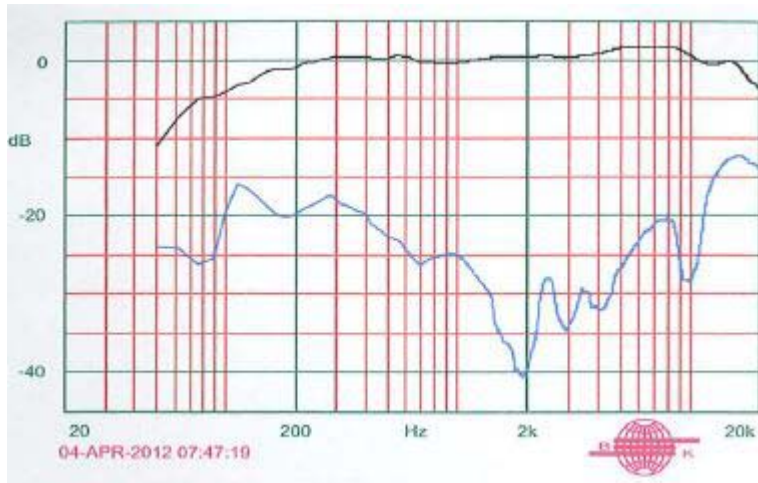

#### Description

Professional electret microphone with the illuminated ring at the back of the head, covering a wider viewing angle.

The new design of the housing and the implementation of special designed RF filters in the microphone head create a superb RF rejection.

The TMD/382 has an effective and robust shock mount system, comes with an integrated windshield and an very natural linear tone detection.

It has a rigid microphone neck with gooseneck hinge and high quality connector (MINICON Neutrik), matt black finish.

Low susceptibility to mobile phone interference, PDAs and other wireless devices operated within a conference room.

#### Technical Data

Complies with international standard IEC60914

**Transducer Principle**  
Electret condenser

**Directivity**  
cardioid

**Frequency Response**  
100Hz - 20KHz

**Sensitivity** (free field, no load, 1 kHz)  
-44 dB (0dB = 1V/Pa)

**Output Impedance**  
1 kOhm

**Max. SPL** (Signal pressure level)  
122 dB

**Signal-to-noise Ratio**  
>72 dB (A-weighted, 1kHz)

**Operating Voltage**  
5 VDC (1.5V ... 10V)

**Indicator ring**  
colour red  
Nominal current 20 mA (50 mA max.)

**Connector**  
Neutrik Minicon, lockable

**Dimensions**  
Total length 360 mm  
dia 16.0 mm

**Weight**  
87 g

#### Variations

Various lengths  
Two gooseneck types

#### Optional

TMD/01  
Conference Microphone 360mm, black.  
(part no. 01.0701)

Clip-On Microphone TMD/CL  
Conference Microphone, black.  
(Article no.: 01.0740)